


Products and their function

	Product	Temperature	Type of system	System age	Additive function
Agents Prevention Agents Conditioners	FILMAX+Thermakil®	High / low	Thermal		Universal and anti-algae
	FILMAX 7.0	High	Thermal		At neutral pH, for aluminium and outdated systems
	FILMAX 8.0	High	Thermal		Universal, FDA approved for food grade
	FILMAX 9.0	High / low	Thermal		Biological Regenerating agent for anti-freeze
	DEOXID	High	Steam output		For steam boilers, FDA approved food grade FDA approved
	FILMAX-SAN	High / low	DHW		Food grade for DHW systems, FDA approved food grade
	SERIE POLIFOS	High / low	DHW		Scale inhibitor - Anti-corrosion agent FDA approved
Decontamination	ANTINEX+Thermakil®	High / low	Thermal		Universal, for average outdated systems
	ANTINEX 7.0	High	Thermal		At neutral pH, for outdated or old systems
	FERRONEX	High / low	Thermal		Pickling-fluxing agent for new or recent systems
	THERMAKIL	Low	Radiant heat		Dissolver of algae for circuits
	PREVENTORE ANTIALGA	Low/high	Radiant heat		Bacteria prevention agent
Descalers	DISINEX VIRAGGIO	High / low	Heat exchanger		For boilers and heat exchangers coils. No aluminum and galvanized surfaces
	DISITANCK	High / low	WC tanks		Descaler for WC flushing tanks
	ZINCONEX POLVERE	High / low	Heating / DHW		Powder, specific for aluminum and galvanized surfaces
	ZINCONEX-AL	High / low	Heating / DHW		Ready to use, specifically designed for aluminum and galvanized surfaces
	ZINCONEX-LQ	High / low	Heating / DHW		Concentrated liquid for aluminum and galvanized surfaces
	DETERM SPRAY	Fume Side	Heat exchanger		Cleaner for boiler heat exchanger burner
	THERMOCLEAN	Fume Side	Heat exchanger		Descaler for combustion chambers
	THERMOSAN	Fume Side	Heat exchanger		Passivating agent for combustion chambers
	THERMONET CALDAIE	Fume Side	Heat exchanger		Concentrate specific for combustion chambers
	THERMONET FUMI	Fume Side	Heat exchanger		Disruptive agent for soot and unburned deposits
Leak sealant	FASTOP-IT Tipo A	High / low	Thermal		For daily leaks of less than 10 liters of water
	FASTOP-IT Tipo B	High / low	Thermal		For daily leaks ranging from 10 to 30 liters of water
	FASTOP-IT Tipo C	High / low	Thermal		For daily leaks ranging from 30 to 400 liters of water
	FASTOP-IT Tipo D	High / low	Thermal		For daily leaks between 400 and 1000 liters of water
	FASTOP-IT M	High/low	Thermal		For multi-layer systems and synthetic materials of water
	FASTOP PERMANENT	Low	Radiant		For radiant systems at low temperature
	FASTOP SOLAR	High	Solar		For solar systems
	FASTOP-IS	High / low	DHW		For daily leaks of less than 25 liters of water

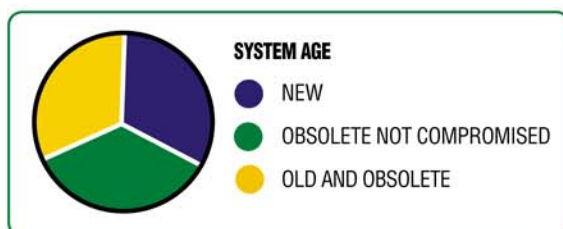

Indicating a better performance of the products