


# FASTOP PERMANENT



## Sealant for floor systems

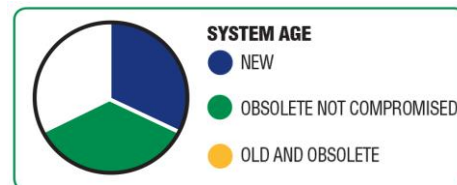

### DESCRIPTION:

FASTOP PERMANENT protects and seals heating systems in steel, copper and aluminum from corrosion; it is particularly indicated on floor heating systems in synthetic materials with problems of oxygen diffusion. **Sealing leaks of up to 10 liters a day** is done by creating a protective coating on metal pipes. The dispersing component of FASTOP PERMANENT prevents the sedimentation on the pipe walls, **thus offering the guarantee of a protective coating against corrosion.**

As a protective use of FASTOP PERMANENT is also suitable for new systems to avoid leaks that may occur over time, keeps the adjustment and calibration parts free from obstructions. It **protects and seals** all floor systems in synthetic materials, both new and old, as well as all heating systems.

### INSTRUCTIONS FOR USE:

Wash well the systems that contain large amounts of sludge (use the product ANTINEX+ Thermakil®). At this point, fill the heating system in half with water. Introduce the required amount of FASTOP PERMANENT (**concentration 1 – 2 %**) with the FILTANK metering unit or manual pump through the filling valve. Fill the system with water and vent it well. **FASTOP PERMANENT can be used with all anti-freezing fluids normally used, but not with other chemicals.** The product must not be discharged or removed from the system; however, after two years, in order to ensure an excellent anticorrosive protection, it is advisable to unload the system and recharge again with water and FASTOP PERMANENT, or use the FILMAX+Thermakil® filming liquid. Maintenance and periodic inspection is recommended

**N.B.** Shake well before use until the complete deposit on the bottom of the tank is completely dissolved.

### TECHNICAL DATA:

Appearance	liquid
Color	blue / light blue
Smell	without smell
pH	c.a 6,8 ÷ 7,5
Density @ 20 °C	1,01 ÷ 1,03 g/cm <sup>3</sup>
Solubility in water	miscible
Product expiry 5 years from the date of production	

### PACKAGES:

Tanks 5 lt, boxes with 4 pieces.

Last update: 03.04.2023

