

# WL-BOXC



## DESCRIPTION:

Housings for filtration and treatment of water with Neutral pH and drinking water.

**Domestic use:** filtration and treatment of drinking water, protection of taps, boilers, washing machines, and other installations.

**Technical-use:** pre-filtration, micro-filtration; protection of pumps, heating systems, softeners, demineralising and chlorine-removing appliances, reverse osmosis units.

## TECHNICAL DATA:



**Maximum pressure** 8 Bar. **Maximum temperature** 45 °C. Non-toxic materials. Reinforced polypropylene **head and ring**. **Transparent glass:** SAN **O-ring:** ETP. **Vent valve:** polypropylene body with ETP O-ring. **IN / OUT threaded inserts:** CW 614 N. brass.

## Dimensions and Attacks of container BOXC

Containers with transparent glass

Female IN / OUT connections with brass insert

Cartridge height	Attacks IN/OUT	mm A	mm B
5"	3/4"	191	133
5"	1"	197	145
7"	3/4"	241	133
7"	1"	247	145
10"	3/4"	315	133
10"	1"	321	145
20"	3/4"	571	133
20"	1"	571	145

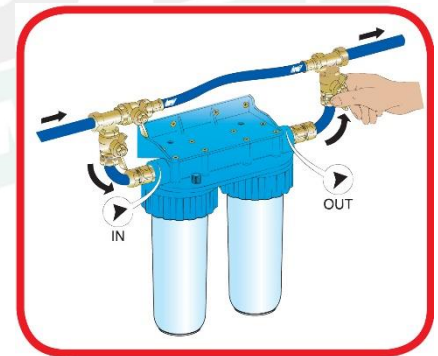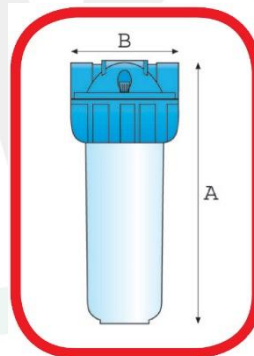

## SEALING AND ASSEMBLY:



FILETTO CONICO  
TAPER THREAD



FILETTO PARALLELO  
PARALLEL THREAD



SIGILLANTI ANAEROBICI  
ANAEROBIC SEALANTS



SILICON SEALING TAPE  
SILICON SEALING TAPE



PASTA VERDE  
GREEN PASTE



TWINE SEAL  
TWINE SEAL



CANAPA  
HEMP



NASTRO P.T.F.E.  
P.T.F.E. BAND

Last update: 20.04.2023

